

SHF 335

Submerged Arc Welding Flux - Hardfacing Applications

Standards

| | |
|-----------------|---------|
| EN ISO 14174 | SA CS 3 |
| TS EN ISO 14174 | SA CS 3 |


Properties and Applications

Alloyed and agglomerated flux, which is designed for submerged arc hardfacing of parts subjected to metal to metal friction wear, moderate impact and low stress mineral abrasion. Provides weld metal with 325-400 HB hardness, when used with SW 702 wire electrode. Possible to use in direct current. Hardness and transfer of alloying elements to the weld metal depends on welding parameters used. Gives very smooth and clean weld bead surfaces, slag removal is very easy and generally slag is self releasing.

Typical Applications : Hardfacing of pinch rollers, table rolls, idlers, couplings, piston rod ends.



Typical Applications

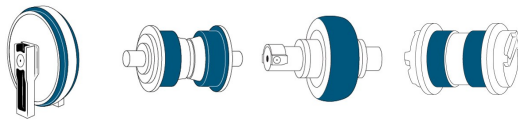

Typical Chemical Values of Weld Metal

| Welding Wire | Type of Analysis | C | Si | Mn | Cr | Mo |
|--------------|------------------|------|------|------|------|------|
| SW 702 | Weld Deposit | 0.20 | 0.65 | 1.50 | 2.00 | 0.45 |

Typical Mechanical Values of Weld Metal

| Test Condition | Welding Wire | Hardness (HB) | Hardness (HRC) |
|----------------|--------------|---------------|----------------|
| As welded | SW 702 | 325 - 400 | 33 - 40 |

Application Information

Welding Positions



PA PB

Welding Parameters & Efficiency

Polarity:



Packaging Information

| Product Code | Quantity per Box | Box Gross Weight (kg) | Boxes per Outer Box | Outer Box Gross Weight (kg) | Packaging Type |
|--------------|------------------|-----------------------|---------------------|-----------------------------|----------------|
| 408040AGM2 | 25 kg | 25.60 | 1 | 25.60 | Craft Bag |

Storage & Re-Drying Information

Generally not required. If required, redry for 1 hour at 110°C.
 During transportation and storage, it should be ensured that the packaging is not damaged or torn.
 It should be stored in a dry room (relative humidity < 50%, room temperature > 20°C) on wooden pallets.
 It has to be dried at 350°C for 2 hours.